



 Like, Follow, Subscribe  
 facebook.com/thewetseat  
 instagram.com/thewetseat  
 thewetseat.com/fitting-care/

**To watch a video of how to fit, visit [www.thewetseat.com/fitting-care](http://www.thewetseat.com/fitting-care)**

*Important*



This seat cover suits front bucket type seats with removable headrests only  
 Please read these instructions carefully before installation.  
 Install seat covers **exactly** as described in fitting instructions.  
 Incorrect installation may affect SRS Side Seat Airbag operation resulting in injury or death.

Note: For vehicles not equipped with Side Seat Airbags please fit the drivers side cover on the passenger side seat and vice versa. This allows for the side panel of the seat (door-side) to be protected.

*Care of your Wet Seat covers*

For light marks and surface dirt a damp cloth, chamois or wet wipes will suffice.  
 For heavier marks and stains machine wash your Wet Seat,  
 Set to cold wash, gentle cycle using standard washing powder.  
 Dust off the covers first before putting them into a machine wash.  
 For salt water, sand or mud also try to hose down your Wet Seat, cloth line dry in 1 hour  
 (Ambient temp 20 degrees Celsius).

*Kit Contents*

- 1 x Right Hand (Driver Side) Universal Wet Seat Cover
- 1 x Left Hand (Passenger Side) Universal Wet Seat Cover



**The Wet Seat™** Neoprene Seat Covers

The Wet Seat neoprene seat cover is a wet suit for your car seats.  
 These innovative covers are designed for fitting onto all passenger vehicles.  
 Catering for all seat types, so whether it is a 4x4, ute or the family wagon,  
 The Wet Seat is a versatile cover designed for the Australian way of life.  
 The Wet Seat is:

- UV Safe, Wont fade in the sunny Australian conditions
- Water Resistant, Perfect for the beach, water sports, water crossings, fishing, camping, touring and more!
- Dust, Dirt, Sand & Mud Resistant, wont let any of these seep through to your seat keeping your seats clean & dry!
- Superior Comfort & Aesthetically Appealing
- Abrasion and Chemical Resistant
- Non Soiling and Non Static, Simple removal of dust and pet hair

Australia's most trusted neoprene seat cover since 2007.

*Contact Us*

 Inland Australia Pty. Ltd.  
 Unit 2/10c Childs Road.  
 Chipping Norton.  
 NSW. 2170. Australia  
 +61 2 9724 9499  
 [sales@thewetseat.com](mailto:sales@thewetseat.com)  
 [www.thewetseat.com](http://www.thewetseat.com)

*The Wet Seat Neoprene Seat Covers - [www.thewetseat.com](http://www.thewetseat.com)*

1. Remove the headrests from the front seats backrests (Fig.1)
2. Release the flap from behind and beneath the front seats if applicable (Fig.2)
3. Determine the side of the seat cover by locating the care label on the inside of the seat base cover (Fig 3.)

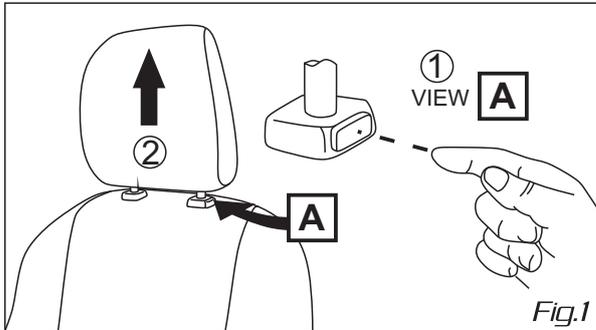


Fig.1

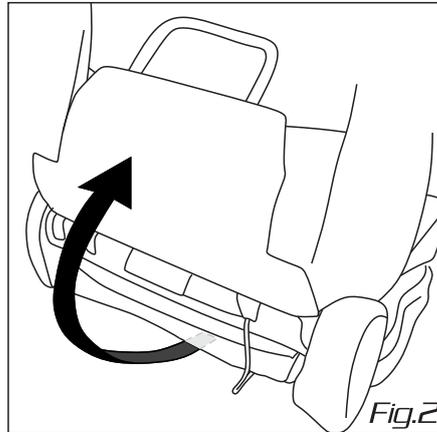


Fig.2

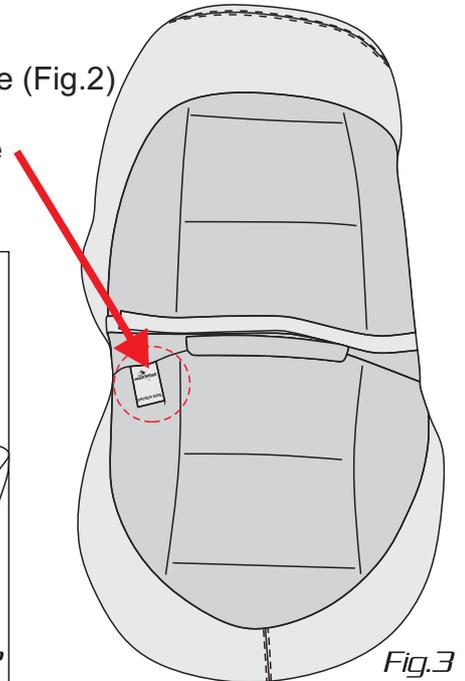


Fig.3

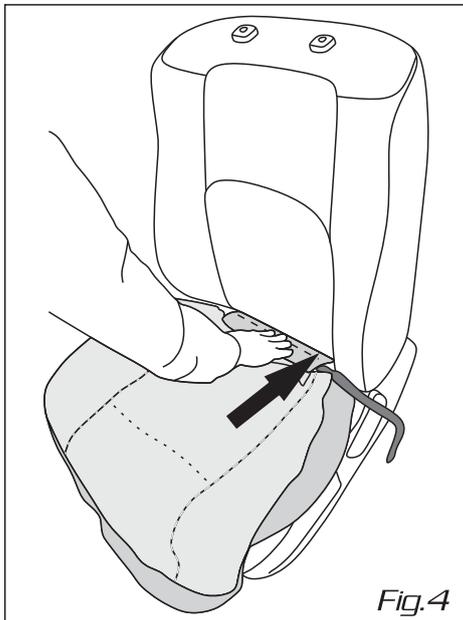


Fig.4

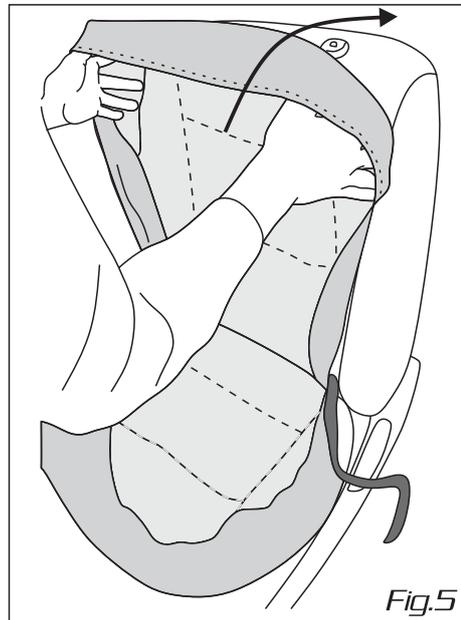


Fig.5



Fig.6

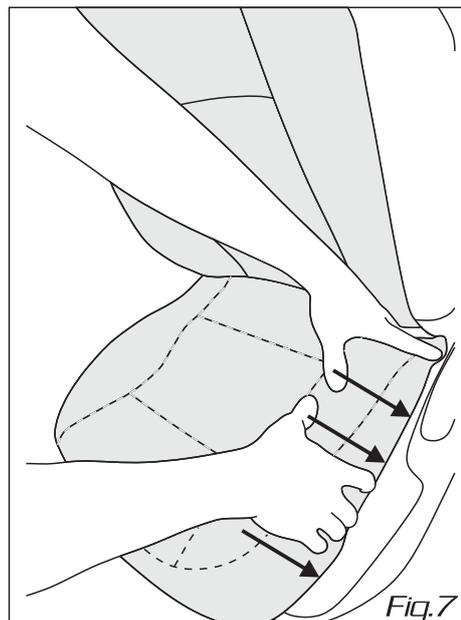


Fig.7

4. Turn The Wet Seat cover inside out then feed neoprene rod flap in between seat backrest and base (Fig.4).
5. Roll backrest part of The Wet Seat cover over seat backrest and align to seat contours (Fig.5)
6. Roll base part of The Wet Seat cover over the seat base and align to seat contours (Fig.6)
7. Where possible, tuck base part of The Wet Seat in-between the seat base and plastic trimming surrounding the base (Fig.7)

## HEADREST HOLES


Note: As the location of the headrest prongs vary between vehicles, headrest holes are not pre-cut into the Wet Seat covers.

Please follow the below steps carefully in inserting holes into The Wet Seat cover.

### 8a. Hole Punch Method



With the Wet Seat aligned to seat backrest, mark the location of the headrest prongs. Take the cover off the seat and place on a flat surface with the marked area facing up. Be careful not to have the seat cover folded over when using the punch.

Using a 1 inch hole punch, punch holes in The Wet Seat cover at the marked areas (Fig. 8a)

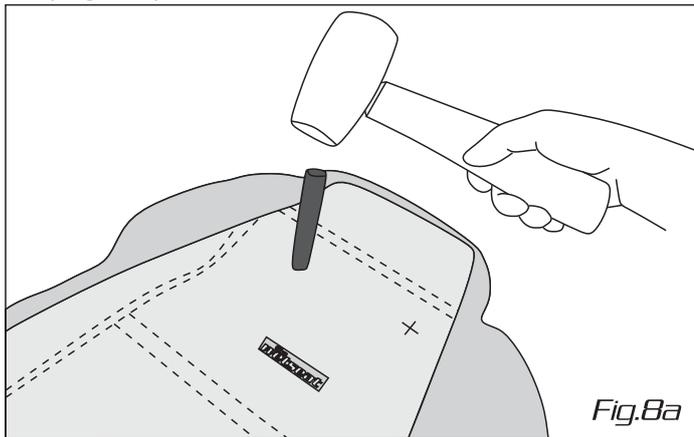

### 8b. Cutting with Scissors Method



With the Wet Seat aligned to seat backrest, Use your index finger and thumb to locate the headrest prong position. Pinch cover and snip cover across about the size of a 10 cent coin (Fig. 8b).

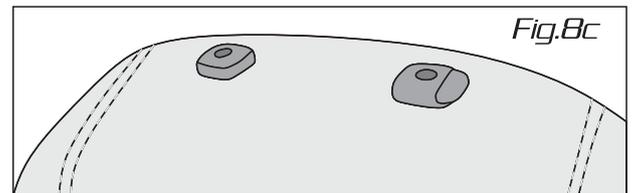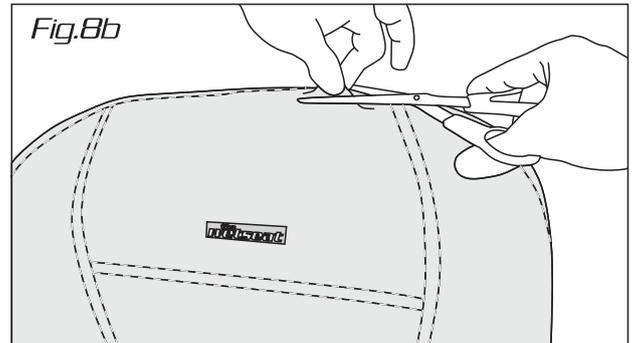

Once complete, refit cover as noted in Steps 3-6 and tuck the cut headrest holes under the plastic trimming (Fig. 8c).



9. Feed the hook & loop ties from the side to the back and secure. Be careful not to use too much force when pulling as the thread may come loose between the ties and cover (Fig. 9).

10. Figure 10 shows how the seat cover should look when installed (Fig. 10).

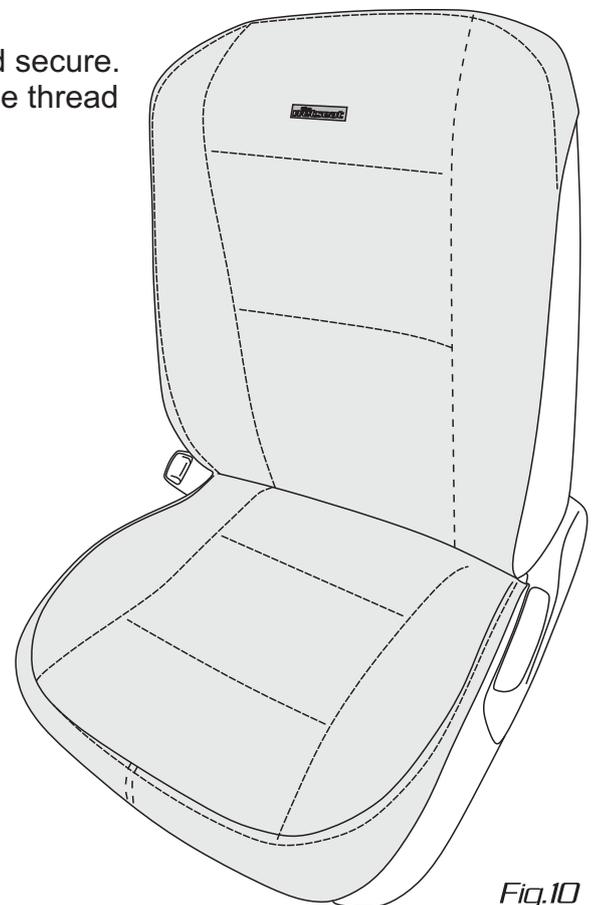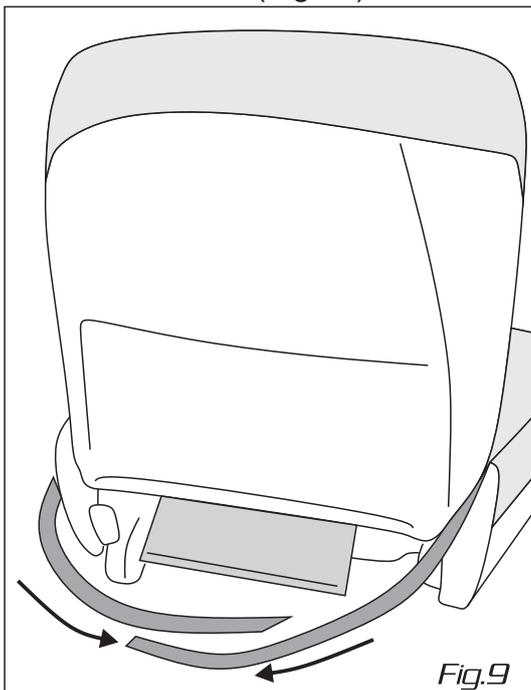

## TAILOR MADE HEADREST COVERS

11. If you have also received front Tailor made Headrest Covers turn them inside out and lay upside down on top of the headrest. Proceed to wrap the headrest cover over the headrest by rolling it down evenly. To make sure the headrest cover is being fitted correctly, ensure the seams are aligned before rolling it down. Once fitted, attach the hook and loop tapes underneath (Fig.11).
12. Re-install the headrests (Fig.12).
13. Repeat steps 1-12 for remaining side cover.

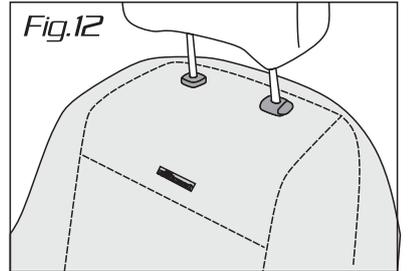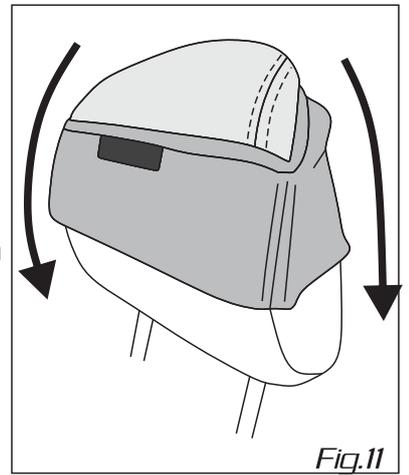

## IMPORTANT

Your Wet Seat covers are airbag compatible by way of its design. Once you have finished fitting the covers, please ensure that the correct side has been fitted. This can be seen by checking your seats airbag seams are not fully covered by The Wet Seats outer panel which should come up to, but not wrap around the seats SRS airbag seam as seen in Fig.13.

